

### Robertson Double Tier Chandelier

Item # RL 5542

#### NOTICE:


This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

- 1. Carefully remove all parts from the carton.
- 2. Loosen set screw (J), thread top loop (G) onto the center nipple (H) by turning clockwise direction. Secure by tighten set screws (J).
- 3. Open the quick link (E) on one end of the chain (F) and attach to top loop on center hub (G).
- 4. Determine correct length of chain for desired hanging height. Using pliers, open chain link and remove unnecessary chain.
- 5. Open the quick link (E) on other of chain (F) and connect to mounting loop (C).
- 6. Unscrew the canopy ring (D) from chain mounting loop (C) and slide canopy (B) and canopy ring (D) on chain.
- 7. Connect the safety steel wire from the fixture and the safety cable from ceiling with lock nut. (See illustration A).
- 8. Attach chain mounting loop (C) to thread nipple (A) using the ceiling loop screw.
- 9. Gently pull outlet box wires to hang.
- 10. Thread wire from center hub (G) through chain, and into the hole in the center of canopy (B).
- 11. With another person supporting the weight of the fixture, connect the electrical wires to the outlet box wires as shown in Fig.1.
- 12. Wrap all connections in electrical tape for additional protection.
- 13. Tuck all wires neatly into the electrical box.

# RALPH LAUREN



#### **ASSEMBLY INSTRUCTIONS**

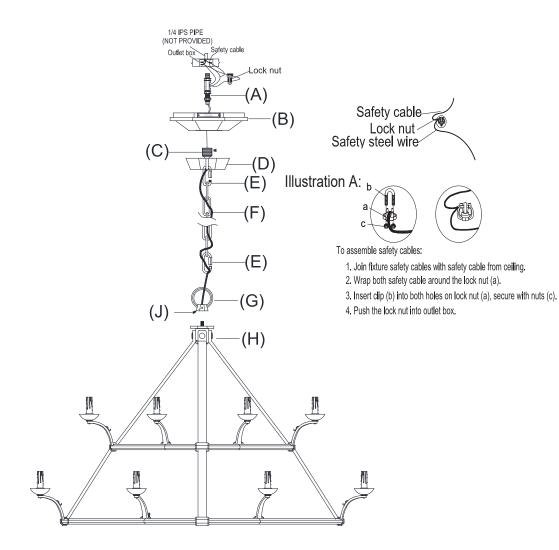

#### Robertson Double Tier Chandelier

Item # RL 5542

#### NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

- 14. Insert top thread nipple (A) in mounting 1/4 IPS PIPE.
- 15. Slip canopy (B) to ceiling and secure with threaded canopy ring (D).
- 16. Insert light bulbs into the sockets.
- 17. Reconnect power and test operation of fixture.
- 18. Installation is now complete.

**Care Instructions:** Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.

## RALPH LAUREN

