


CANCUN™

FP80160B-220 52" Wet Location Fan

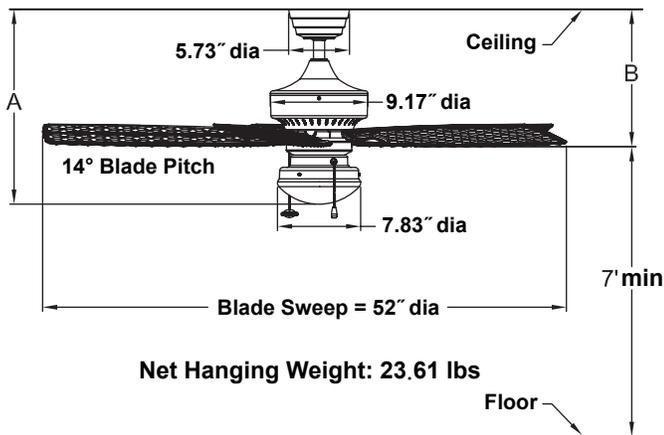

	A	B
Fan w/4.5" downrod	18.36"	12.95"
Fan w/12" downrod	25.86"	20.45"
Fan w/18" downrod	31.86"	26.45"
Fan w/24" downrod	37.86"	32.45"
Fan w/36" downrod	49.86"	44.45"
Fan w/48" downrod	61.86"	56.45"
Fan w/60" downrod	73.86"	68.45"
Fan w/72" downrod	85.86"	80.45"

Available Finish

OB	Oil-Rubbed Bronze with Frosted White Glass
----	--

INSTALLATION REQUIREMENTS:

Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Ceiling fan requires a grounded electrical supply line of 220~240 volts AC, 50 Hz, 5 amp circuit.

MOTOR SPECS:

188 x 25-220 motor is designed for optimal performance with this fan.

BLADE SETS:

A set of five 22" wet location rated all-weather antique woven bamboo finish blades is included.

CONTROL OPTIONS:

Optional C2-220 and C6-220 wall controls and CR4WH-220 remote controls (with receiver units) are available—sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

Two 60-watt G9 halogen bulbs are included. Maximum downlight wattage not exceed 120 watts.

DOWNROD OPTIONS:

The Cancun™ fan comes with a 1" Dia. x 4.5" downrod. Optional downrods are available in 12", 18", 24", 36", 48", 60", and 72". For installations requiring a longer downrod, a downrod coupler is available. The Cancun™ fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for up to 52°. Optional close-to-ceiling kit is available as well-sold separately. Call your local dealer for more information.

LOCATION USE:

Fan is rated for dry, damp and wet locations.

TUV/GS Efficiency Info (220V)

Fan Speed	Max RPM	Amps	Watts
High	137	0.33	78
Med	89	0.22	34
Low	53	0.14	12